U.S.Robotics

Model USR5470
Wireless Network Starter Kit

Includes
Model **USR5462**
802.11g Wireless Router
Model **USR5422**
802.11g Wireless USB Adapter

Wireless Networking

Features and Benefits

What you need to start a Wireless network

Easy to Install and Use	Quick and easy installation with Universal Plug and Play, will have you sharing your Internet connection in minutes
Great Wireless Compatibility	Compatible with all Wi-Fi (54 Mbps 802.11g and 11 Mbps 802.11b) wireless devices
Flexibility and Portability	Slim profile USB Adapter is easily transportable between work locations and USB format is completely compatible with both laptop and desktop PCs, delivering high performance with a USB 2.0 interface
Solid Security	Built-in firewall protects your PCs against hackers - support for Web Site blocking, MAC Address Authentication, 64/128-bit WEP encryption and WPA
Universal Connectivity	Integrated 4-Port 10/100 Ethernet switch to support up to 4 wired devices (up to 253 with additional hubs/switches)

Model USR5470
Wireless Network Starter Kit

Includes
Model USR5462
802.11g Wireless Router
Model USR5422
802.11g USB Adapter

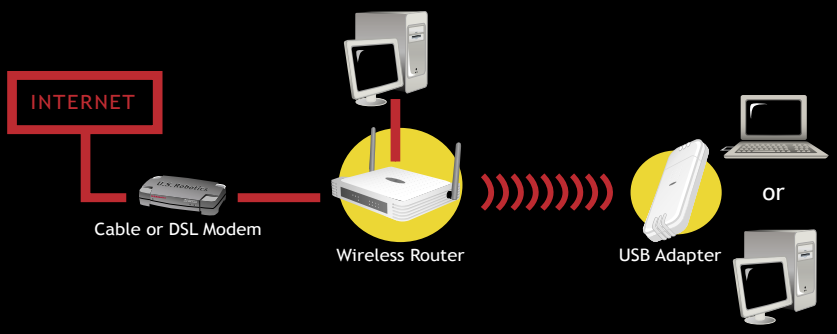

802.11g Wireless Router

Specification and Standards

General

- Complies with IEEE 802.11g 54 Mbps and 802.11b 11 Mbps wireless standards
- Operating Channels: 11 (US, Canada), 13 (Europe - ETSI)
- RF Power Output: 16 dBm 802.11b & 15 dBm 802.11g
- Supports Universal Plug and Play (Windows Me and XP)
- Auto MDI/MDIX support on LAN ports
- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Class II Fast Ethernet repeater
- IEEE 802.3x Flow Control
- Integrated firewall protection for security
- Static and dynamic IP addressing
- DHCP server (LAN) and client (WAN)
- Embedded PPP over Ethernet (PPPoE)
- Embedded PPTP Client
- VPN pass-through support for PPTP, IPSec, and L2TP
- DMZ support
- Supports up to 253 clients (with additional hubs or switches)

Security

- Encryption - WEP 64/128 bit, WPA
- Enhanced security with secure key generation - WPA-PSK (including TKIP)
- Mac Address Authentication, Disable Broadcast SSID

Physical

- Visual diagnostic LEDs: Power, WAN, LAN, WLAN
- One RJ-45, 10/100 Mbps Ethernet WAN port
- Four RJ-45, 10/100 Mbps Ethernet LAN ports

Dimensions/Weight

- 6.13 x 5 x 1.12 inches (15.6 x 12.7 x 2.84 cm)

Regulatory

- FCC approved
- IC approved
- UL/CUL listed
- CE Approved

802.11g Wireless USB Adapter

Specification and Standards

General

- Complies with IEEE 802.11g 54 Mbps and 802.11b 11 Mbps wireless standards
- Operating Channels: 11 (US, Canada), 13 (Europe - ETSI)
- USB 2.0 (backward compatible with USB 1.1)
- Supports Universal Plug and Play (Windows Me and XP)
- RF Power Output: 17 dBm (maximum)

Security

- Encryption - WEP 64/128 bit, WPA
- 802.1x authentication

Physical

- Low profile stick format
- Visual diagnostic LED

Dimensions

- 3.25 x .8 x .375 inches (8.26 x 2 x .95 cm)

Regulatory

- FCC approved
- IC approved
- UL/CUL listed
- CE Ap proved

Wireless Network Starter Kit

Package Contents

- U.S. Robotics Wireless Router
- U.S. Robotics USB 2.0 Wireless Adapter
- One Ethernet cable
- Quick Installation Guide
- CD with full User Manual
- Power Supply

Dimensions/Weight

- 15 (W) x 13 (H) x 3.64 (D) inches (38.1 x 33 x 9.25 cm)
- Weight: 2.6 lb (1.18 Kg)

Language Support

- Blister pack: English, German, French, Italian, Spanish, Dutch
- Install guide: English, German, French, Italian, Spanish, Dutch
- User guide (CD Only): English, German, French, Italian, Spanish, Dutch, Czech, Polish, Hungarian, Portuguese, Turkish, Russian

Minimum Systems Requirements

- Router - Connect any device that supports 10/100 or 1000 Mbps Ethernet and RJ-45 connector
- USB Adapter - Any PC or Laptop with available USB port and Windows 98SE/Me/2000/XP

Warranty

- 2-year limited manufacturer warranty from date of purchase

U.S.Robotics®

IC Approved
Approuvé par IC